



Myyntipäivystäjä p. 0500-738122

puh. 09-2970201 fax 09-2970093

www.vkt-tuotanto.fi

myynti@vkt-tuotanto.fi

Nyåkerintie 37, 02420 Jorvas



Akkukäyttö



Verkkovirtalaite



Ulkoinen kalibrointi



Taaraus



Tulostin



Tasojen tiiviysluokka

Tiedonsiirto radiolla



M-hyväksyntä, optio



WWSCE-punnitustaso

Dini Argeo WWSERF

- Radiovälitteinen akseli / kokonaispaino vaakajärjestelmä.
- 2-32 kpl punnitustasoja , punnitus 6000-15000 kg / taso.
- Tason koko 700 x 450 mm. Paino 26 kg.
- Painotiedot voidaan ohjata PC:lle tai kannettavaan näyttölaitteeseen.
- Painotiedon+ punnituksen kellonajan tulostus printerillä.
- Ajoneuvojen yksilöinti mahdollista.
- Staattinen akselipunnitus 2 :lla tasolla ja tasausmoduleilla.
- **CE-M** hyväksyntä, malleille jossa ajoneuvo on kokonaan vaakalevyjen päällä.
- Upotettavissa lattiaan.
- Verkkovirta- ja akkukäyttöinen (näyttölaite).
- Automaattinen virrankatkaisu.
- Heikon latauksen varoitus.
- Punnitustasojen vesitiiviysluokka IP-68.
- Saatavissa isoilla 60 mm numeroilla oleva näyttölaite, optio.
- Saatavissa kalibrointitodistuksella.



WWSERF wheel and axle weighing platforms



WWSE: dimensions in mm.



Example of application with 4 wireless platforms and DFWKRPRF indicator for the reading and printing of the weight through a remote indicator.

Wireless platforms designed for creating weighing stations for large vehicles and axle weighing, avoiding the hassle of connecting cables between the platforms and the indicator. Ideal for weighing larger vehicles (vans, trucks, tankers, trucks etc.); very precise and sturdy, with attention to details.

FEATURES

- Platform dimensions: 700x561mm. Height 58mm. Weight approximately 26kg.
- Loading surface: 700x450mm.
- Platform with built-in indicator and radio module.
- Weight transmission to the remote indicator or external device.
- Fitted with wheels for transporting the platform.
- Very handy. Sturdy structure, made in special aluminium, which guarantees lightness and makes these platforms suitable also for harsh working conditions.
- Stainless steel IP68 load cells.
- Power supply: internal rechargeable battery (about 40 h battery life) and charger included.
- Special vulcanised nonslip rubber applied under the platform, for good grip on all types of surfaces.
- The WWS platforms are patented; the number is 1.342.302.
- Available also in CE-M 3000e approved version.



OPTIONS AND ACCESSORIES

- High resolution model for internal factory use.
- Frame for flush floor installation.
- Levelling module for axle weighing WWSELM.

NOTES ON THE CE-M APPROVED VERSIONS

- The weight of the **single platform** is legal for trade, if the platform is connected to DINI ARGEO indicator.
- The **total weight of the vehicle** is legal for trade depending on the application:
 - The wheel weighing systems, with a number of platforms equal to the number of vehicle's wheels, are approved if connected to DINI ARGEO indicators, because the weight of the vehicle is determined in only one weigh.
 - The axle weighing systems are for internal use only.

Available versions

Code	Surface (LxP) mm	Max Capacity kg	Division kg	CE-M Division kg	HR Division kg
WWSE6TRF	700x450	6000	2	--	0,2
WWSE10TRF	700x450	10000	5	--	0,5
WWSE15TRF	700x450	15000	5	--	0,5
WWSE6TMRF 	700x450	6000	--	2	--
WWSE10TMRF 	700x450	10000	--	5	--

NOTES:

- The CE-M division is referred to the weight of the single platform.
- The CE-M division in which the sum weight is indicated in the wheels weighing systems (4 platforms) is equal to the sum of the single platforms' divisions, rounded. Example: with 4 approved platforms with division 200g, the approved sum weight will be indicated with division 1kg.

Main connectable indicators


Code	Description
DFWKRPRF	Wireless weight repeater in Rack version, for create wireless vehicles weighing stations with WWSERF radio platforms or DFWL weight transmitters. Fitted with transport suitcase, 17-key keypad, LCD backlit display, time/date, thermal printer, 868MHz radio frequency module and dedicated program.

Options only available at time of order


Code	Description
EHR	High resolution model for internal factory use.

Accessories

Code	Description
WWSELM	Levelling module for axle weighing with WWSE and WWSD series' platforms, surface 1200x700 mm, h= 52 mm, weight of about 28 kg, fitted with junction and fixing kit.

 WWSETF Frame for flush floor installation for WWSE series platform.

AXLE WEIGHING SYSTEM INSTALLATION:



New WWSERF wireless platforms

Dini Argeo is pleased to present the new WWSERF series wireless platforms for creating static wheel and axle weighing systems. With the new wireless technology, the installation of the platforms is much simpler, but at the same time keeping the same sturdiness, accuracy, and reliability of the cable version.




FEATURES

- Built-in weight indicator and suitable for vehicle passage.
- Radio module for transmitting the weight from a distance.
- Indicator with built-in long-life NiMH battery.
- Up to 32 platforms can be connected directly to a PC.

Code	Dimensions (l x w) (mm)	Capacity (kg)	Division (kg)	Division CE-M (kg)
WWSE6TRF	700 x 450	6000	2	-
WWSE10TRF	700 x 450	10000	5	-
WWSE15TRF	700 x 450	15000	5	-
WWSE6TMRF M	700 x 450	6000	-	2
WWSE10TMRF M	700 x 450	10000	-	5

Wheel weighing system

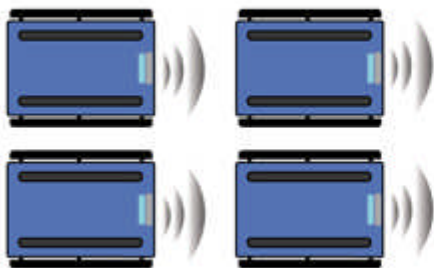

JOHN SMITH LTD	
5TH AVENUE LONDON WWW.JOHNSMITH.COM	
WHEEL 1	1000 kg
WHEEL 2	1010 kg
WHEEL 3	1010 kg
WHEEL 4	1000 kg
GROSS=	4020 kg
TARE=	0 kg
NET=	4020 kg
10/05/2011	15:00

Static axle weighing system



JOHN SMITH LTD	
5TH AVENUE LONDON WWW.JOHNSMITH.COM	
AXLE 1	2110 kg
AXLE 2	2100 kg
AXLE 3	2000 kg
AXLE 4	2120 kg
AXLE 5	2100 kg
TOTAL	
GROSS=	10430 kg
TARE=	0 kg
NET=	10430 kg
10/05/2011	15:00

**"WVSELM" SERIES
LEVELLING MODULES
FOR AXLE WEIGHING**



WWSELM levelling module

