



VKT-Tuotanto


Myyntipäivystäjä p. 0500-738122

puh. 09-2970201 fax 09-2970093

www.vkt-tuotanto.fi

myynti@vkt-tuotanto.fi

Nyåkerintie 37, 02420 Jorvas




Paristokäyttö



Ulkoinen kalibrointi



Taaraus



Tiiviyysluokka



RST-terästä



Tarkistuspunnitus

KERN FVN


- 3 mallia. Punnitus 6 kg / 1 g – 15 kg / 5 g.
- Punnitustason koko 232 x 202 mm.
- Paristokäyttöinen. 4 kpl 1,5 V D. Käyttöaika n. 1400 tuntia
- Käyttölämpötila -10 / +40 C..
- Vesitiivis rakenne, tiiveysluokka IP-68
- Rakenne ruostumatonta terästä.
- LCD-näyttö, numerokoko 30mm.
- 99 kpl aseteltavia taaroja, tarkistuspunnitushjelma.

- Katso kuva alla olevasta valmistajan esitteestä.

KERN FVN Premium bench scale with EC-Type Approval (M) and high level of protection



FACTORY OPTION

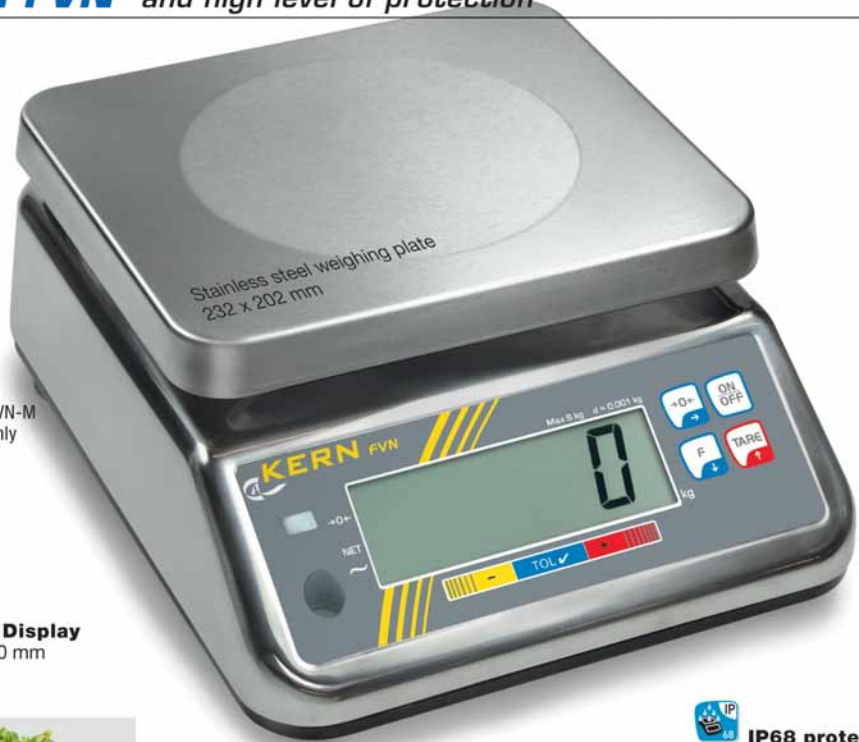

STANDARD



Adjusting program (CAL): For quick setting of the balance's accuracy. External adjusting weight required.



Weighing with tolerance range: Upper and lower limiting can be programmed individually, e.g. dosing / sorting.



Spray and dust protection: The type of protection is shown by the pictogram. For a definition see the glossary.



Stainless steel: the balance is protected against corrosion.



Battery operation: The battery type is specified for each device.



Tare: put back displayed value to „0“ during weighing process, e.g. to add or remove weighing material from a container.

Large LCD Display
digit height 30 mm



Housing made of stainless steel, so it is rustproof and easy to clean

Ideal for the food industry

Carrying grips on the underside for easy transportation of the scale



Waterproof



Ready for use
Battery size D (4 x 1.5V) included.
Operating time approx. 1400 h.
AUTO-OFF function to preserve battery life, can be switched off

Ideal testing and grading balance

- **Fill-to-target function**
Manually programmable target weight. An acoustic and visual signal will be displayed when the target value is reached
- **Weighing with tolerance range** (checkweighing)
Input of an upper/lower limit value. A visual and acoustic signal assists with the portion division, dispensing or grading
- **Classifying** Similar objects are automatically classified according to their weight into predetermined classes (up to 15 classes)



IP68 protection
highest class of protection against dust and water. Making it very robust and durable. Ideal for harsh ambient conditions. It is even possible that the balance can be submerged in water

Robust weighing system
can even be used in refrigerated areas

Technical Data:

Overall dimensions
WxDxH 242x292x122 mm

Net weight approx. 3,5 kg

Permissible ambient temperature -10 ... +40 °C

No mains adapter available

Verification at the factory, we need to know the full address of the location of use.

Model	Weighing range	Read-out	Verific. value	Min. load	Verification KERN	OPTIONS alternative
KERN	Max	d	e	Min		M III Certificate KERN DKD
	kg	g	g	g		
FVN 6K1IP	6	1	-	-	-	963-128
For applications that require verification, please order verification at the same time, initial verification at a later date is not possible.						
FVN 6K2IPM	6	2	2	40	950-128	963-128
FVN 15K5IPM	15	5	5	100	950-128	963-128

Order Hotline: Go to back page of catalogue

93

KERN - Your DKD-Calibration Partner

issues DKD calibration certificates for balances and test weights in its own accredited laboratories. It is internationally valid.

KERN is a manufacturer of test weights in the international classes of accuracy E1, E2, F1, F2, M1, M2, M3, from 1 mg up to 2000 kg
DKD = German Calibration Service



Your KERN specialist dealer