



CE-M III -hyväksyntä



PCS Kappalelaskenta



PROCENT Prosenttipunnitus



TOL Toleranssipunnitus



IP 67 Tiiviysluokka UTEP



IP 68 Tiiviysluokka UTNN



INOX RST-terästä UTNN



230 V Verkkovirtakäyttö



BATT Paristokäyttö UTNN



CAL EXT Ulkoinen kalibrointi



GLP PROTOCOL GLP-yhteensopivuus

Lisätilauksesta



ACCU Akkukäyttö



RS 232 RS232-liitäntä



DKD Kalibrointitodistus

KERN UTEP - UTNN

UTEP-mallit polttomaalattua terästä. UTNN-mallit RST-terästä.

- 4 mallia. Punnitus 600 kg / 200 g -1500 kg / 0,5 kg.
- **CE-M** -hyväksytty
- Mitat 1260 x 840 mm. Korkeus 75 mm.
- Näyttö Luminiscent LED, numerokoko 30 mm.
- Punnitusanturit vesitiiviit, UTEP-malleissa IP-67, UTNN-malleissa luokka IP68.
- Käyttölämpötila -10 C / +40 C
- Materiaali polttomaalattu teräs (UTEP). Ruostumaton teräs UTNN-malleissa. Rakenne todella tukeva, tarkoitettu teollisuus- yms. käyttöympäristöihin.
- **Toiminnot:** Punnitus, kappalelaskenta, prosenttipunnitus, toleranssipunnitus ja tulostus.
- **Lisätarvikkeet:** Näytön lattiajalusta, 4 erilaista tulostinta. Akkukäyttö. RS232-liitäntä.
- Saatavissa myös kalibrointitodistus.
- Katso mallit ja kuvat alla olevasta valmistajan esitteestä.



KERN UTEP • UTNN

Mobile for any situation and for heavy loads, with EC-Type Approval (M)

STANDARD



Display device
KERN KME-TM
battery operation
standard



only with printer ①

UTNN only

Load cells
Nickel-plated steel, IP67

Factory option

3 Years warranty

Strain gauge

Verification

OPTION DKD Certificate +3 days

UTNN only:

Rechargeable battery pack, internal, operating time approx. 35 h, charging time approx. 8 h, must be ordered at purchase, KERN KMN-A01

Dispatch complete on pallet. Please ask for dimension, gross weight, shipping costs

For applications that require verification, please order verification at the same time, initial verification at a later date is not possible.

Model

Weighing range

Read-out

Verific. value

Min. load

Net weight approx.

Options alternative

Verification KERN

Certificate KERN

DKD

950-130



963-130

950-130

963-130

950-130

963-130

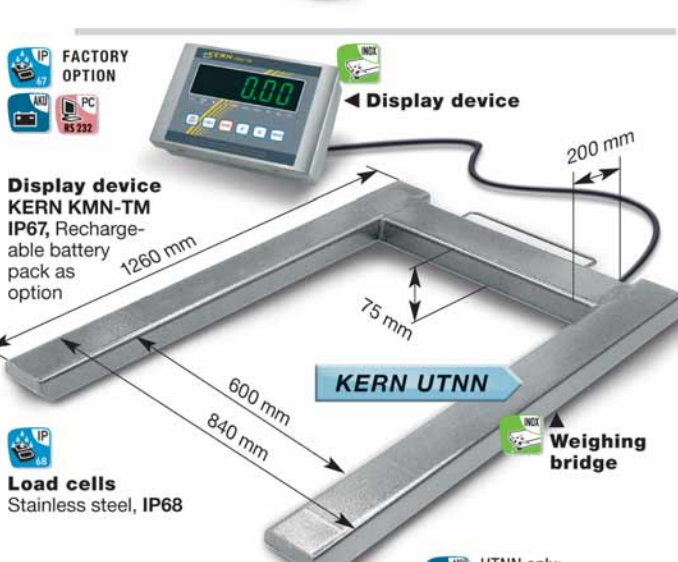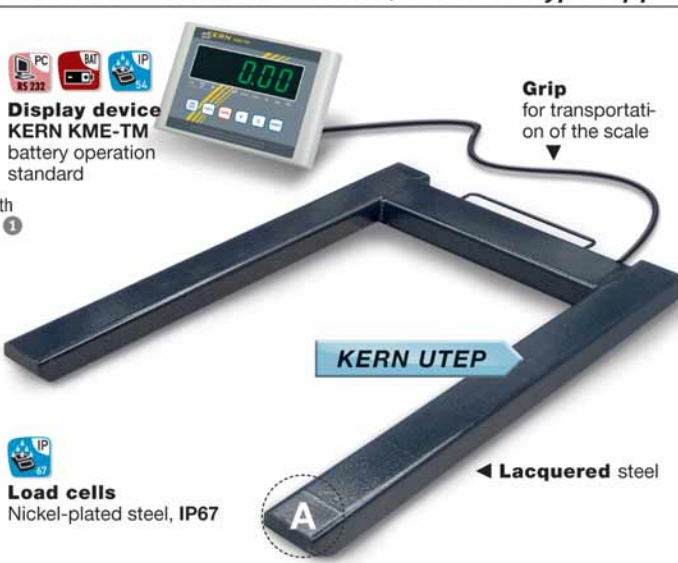

General characteristics:

Verified pallet scale
ideal for commercial and trade use

Load support
Solid steel construction. Extremely resistant to bending due to material thickness (6 mm)

Large bright LED display
digit height 30 mm

Automatic taring
when placing a container, saves time

Roller and load cell
from underneath

Accessories for all models

Stand, stainless steel, height 1100 mm
KERN UTNN-A01

Wall mount for the display device
KERN KME-TM:
KERN KME-A01
KERN KMN-TM:
KERN KMN-A02

Standard printer
KERN YKB-01N
Label printer
KERN YKL-01
Statistics printer
KERN YKT-01

For all printers, see page 109

Technical Data:

Display device
Further details see page 106

Cable length approx. 5 m

Permissible ambient temperature -10 ... +40 °C

PC UTNN only:
RS 232 data interface, including interface cable approx. 1.5 m, must be ordered at purchase, KERN KMN-A03

For applications that require verification, please order verification at the same time, initial verification at a later date is not possible.

Model	Weighing range Max kg	Read-out d g	Verific. value e g	Min. load Min kg	Net weight approx. kg	Options alternative
KERN						Verification KERN
UTEP 600K200M	600	200	200	4	65	950-130
UTEP 1.5T0.5M	1500	500	500	10	65	950-130
UTNN 600K200IPM	600	200	200	4	68	950-130
UTNN 1.5T0.5IPM	1500	500	500	10	68	950-130

68


Order Hotline: Go to back page of catalogue

KERN - Your DKD-Calibration Partner

issues DKD calibration certificates for balances and test weights in its own accredited laboratories. It is internationally valid.

KERN is a manufacturer of test weights in the international classes of accuracy E1, E2, F1, F2, M1, M2, M3, from 1 mg up to 2000 kg

DKD = German Calibration Service



Your KERN specialist dealer