



Myyntipäivystäjä p. 0500-738122

puh. 09-2970201 fax 09-2970093

www.vkt-tuotanto.fi

myynti@vkt-tuotanto.fi

Nyåkerintie 37, 02420 Jorvas



IP 68

Anturien tiiviysluokka.



IP 67

Kytentärasian tiiviysluokka.



INOX

Rakenne RST-terästä.



CE-M -hyväksytyjä.





ATEX-luokitus.

Dini Argeo ETI-sarja

- 27 mallia.
- Punnitus 300 kg/50g -10000 kg/2 kg.
- Tason koko 800 mm x 800 mm – 2 m x 2,5 m.
- Liitettävissä useisiin eri tyyppisiin näyttölaitteisiin, katso näyttölaittemallisto, otsikosta NÄYTTÖLAITE.
- Rakenne ruostumatonta terästä.
- 4 punnitusanturia.
- Punnitusanturit RST-terästä, tiiviysluokka IP-68.
- Kytentärasian tiiviysluokka IP-67.
- Lisätilauksena CE-M III ja CE-M2 -hyväksynnällä.
- Lisätilauksesta saatavissa ATEX-todistuksella.
- Kytentäkaapelin pituus 5m.
- Katso kuvat ja mallit alla olevasta valmistajan esitteestä.

ETI "PROFESSIONAL" SERIES 4-CELL STAINLESS STEEL PLATFORMS

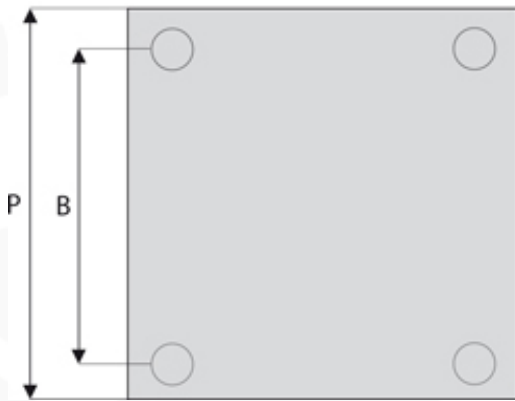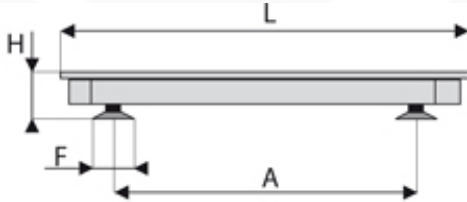

Mod./Dim.	L	P	H	A	B	F
ELCI	800	800	90	650	650	75
ETAI	1000	1000	90	850	850	75
ETMI	1000	1250	90	850	1070	75
ETBI	1250	1250	90	1070	1070	75
ETDI	1250	1500	110	1070	1320	75
ETEI	1500	1500	110	1320	1320	75
ETFI	1500	2000	130	1300	1800	75
ETGI	1500	2000	150	1300	1800	100
ETHI	1500	2500	180	1280	2280	100
ETLI	2000	2500	180	1780	2280	100

dimensions in mm

Low profile **STAINLESS STEEL** electronic platforms with removable loading plate. Fitted with **IP68 STAINLESS STEEL** load cells. Suitable for creating scales and electronic weighing systems for all types of industrial and commercial applications. Standard version is with approved load cell.

MAIN FEATURES

- Fitted with 4 **STAINLESS STEEL** shear-beam OIML approved load cells each with 350 Ohm input resistance with protection against dust and immersion according to IP68 standards.
- Stainless steel bearing tubular structure, with removable stainless steel plate (except for the ELCI models which have a non removable plate) and IP67 junction box housing.
- Adjustable, stainless steel shock-proof jointed feet and level.
- Up to 15 Vdc power supply.
- Hermetic junction box and wiring cables with sheathing according to IP67 standards, and shielded 5m long 6-pin cable with connectors for connection to the indicator.

OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Connection to the indicator and calibration with CE-M 3000e single range or 3000e+3000e dual range approval.
- High resolution models for internal factory use.

OPTIONS FOR ATEX VERSION

- CCATEX: ATEX certificate for each load cell.
- JB4QA: ATEX certified junction box.
- DCATEXMECH: Declaration of conformity of the whole system composed of PLATFORM + JUNCTION BOX + LOAD CELLS (only if the platform is ordered without the weight indicator; otherwise, refer to the certifications available for the indicator to which it will be connected).

EXTRAS AVAILABLE

- Indicator support stand.
- Frames for flush floor installation.
- Access ramps.
- Models with special sizes and capacities.

Available versions

Code	Dimensions (LxPxH)	Nr. of cells	Max Capacity kg	Standard Division g	CE-M Division g (*)	CE-M2 Division g (*)	HR Division g (*)
ELCI3	800x800x90	4x300kg	300	50	100	--	20
ELCI6	800x800x90	4x500kg	600	100	200	100-200	50
ELCI15	800x800x90	4x1000kg	1500	200	500	200-500	100
ETAI3	1000x1000x90	4x300kg	300	50	100	--	20
ETAI6	1000x1000x90	4x500kg	600	100	200	100-200	50
ETAI15	1000x1000x90	4x1000kg	1500	200	500	200-500	100
ETMI3	1000x1250x90	4x300kg	300	50	100	--	20
ETMI6	1000x1250x90	4x500kg	600	100	200	100-200	50
ETMI15	1000x1250x90	4x1000kg	1500	200	500	200-500	100
ETBI3	1250x1250x90	4x500kg	300	50	100	--	20

ETBI6	1250x1250x90	4x500kg	600	100	200	100-200	50
ETBI15	1250x1250x90	4x1000kg	1500	200	500	200-500	100
ETDI6	1250x1500x110	4x500kg	600	100	200	100-200	50
ETDI15	1250x1500x110	4x1000kg	1500	200	500	200-500	100
ETDI30	1250x1500x110	4x2000kg	3000	500	1000	500-1000	200
ETEI6	1500x1500x110	4x500kg	600	100	200	100-200	50
ETEI15	1500x1500x110	4x1000kg	1500	200	500	200-500	100
ETEI30	1500x1500x110	4x2000kg	3000	500	1000	500-1000	200
ETFI6	1500x2000x130	4x500kg	600	100	200	100-200	50
ETFI15	1500x2000x130	4x1000kg	1500	200	500	200-500	100
ETFI30	1500x2000x130	4x2000kg	3000	500	1000	500-1000	200
ETGI60	1500x2000x150	4x3000kg	6000	1000	2000	1000-2000	500
ETHI30	1500x2500x180	4x3000kg	3000	500	1000	--	200
ETHI60	1500x2500x180	4x3000kg	6000	1000	2000	1000-2000	500
ETHI100	1500x2500x180	4x5000kg	10000	2000	5000	2000-5000	1000
ETLI30	2000x2500x180	4x3000kg	3000	500	1000	--	200
ETLI60	2000x2500x180	4x3000kg	6000	1000	2000	1000-2000	500
ETLI100	2000x2500x180	4x5000kg	10000	2000	5000	2000-5000	1000

(*) These divisions are obtainable only with the relative options

Options only available at time of order

Code	Description
ECEM1B	CE-M 3000e approval for class III or IIII scales, with capacity from 31 to 1500 kg.
ECEM2B	CE-M 2x3000e approval for class III or IIII scales, with capacity from 31 to 1500 kg.
ECEM1C	CE-M 3000e approval for class III or IIII scales, with capacity from 1501 to 6000 kg.
ECEM2C	CE-M 2x3000e approval for class III or IIII scales, with capacity from 1501 to 6000 kg.
ECEM1D	CE-M 3000e approval for class III or IIII scales, with capacity from 6001 to 15000 kg.
ECEM2D	CE-M 2x3000e approval for class III or IIII scales, with capacity from 6001 to 15000 kg.
ETHR	High resolution model for internal factory use.
CCATEX	ATEX certificate for each load cell for the following categories: II 1G EExia IIC T6 (Ta -20÷+40°C) TX (Ta -20÷+65°C) and II 1D tD A20 TX°C (Ta -20÷+40°C) TX°C (Ta -20÷+65°C). Complete with manual and ATEX CE CONFORMITY DECLARATIONS (available in EN, DE, FR and IT).
JB4QA	Junction and equalisation box for hazardous areas ATEX, in ABS IP65, with 4 + 1 fairleads for connection with up to 4 load cells. Protection modes: ATEX II 2G Ex ib IIC T6 for gases and ATEX II 2D Ex tD A21 IP65 T115°C for dusts. Complete with manual and ATEX CE CONFORMITY DECLARATIONS (available in EN, DE, FR and IT).
DCATEXMECH	Declaration of ATEX conformity of whole, Ex II 2GD X system with relative whole system label, for mechanical structure with ATEX load cells (each cell must be certified with CCATEX option). ATEX CONFORMITY DECLARATIONS will be supplied in English.

Accessories

Code	Description
CSP38I	Stainless steel support column for the indicators of the DINI ARGEO and SCALE HOUSE range. Dimensions 520 x 527 mm, 1026 mm high, tubular Ø = 38 mm.
CSP38D	Stainless steel support column with painted steel base, for the indicators of the DINI ARGEO and SCALE HOUSE range. Dimensions 350x350 mm, height 750 mm.
ETATFI	Frame for flush floor installation in stainless steel, for 1000x1000 mm platforms.
ETMTFI	Frame for flush floor installation in stainless steel, for 1000x1250 mm platforms.
ETBTFI	Frame for flush floor installation in stainless steel, for 1250x1250 mm platforms.
ETDTFI	Frame for flush floor installation in stainless steel, for 1250x1500 mm platforms.
ETETFI	Frame for flush floor installation in stainless steel, for 1500x1500 mm platforms.
ETFTFI	Frame for flush floor installation in stainless steel, for 1500x2000x130 mm platforms.
ETHTFI	Frame for flush floor installation in stainless steel, for 1500x2500 mm platforms.
ETLTFI	Frame for flush floor installation in stainless steel, for 2000x2500 mm platforms.
ETARI	Access ramp in stainless steel, 1000x900 mm, for 1000x1000 mm and 1000x1250 mm platforms.
ETBRI	Access ramp in stainless steel, 1250x900 mm, for 1250x1250 mm platforms.
ETDRI	Access ramp in stainless steel, 1250x1100 mm for 1250x1500 mm platforms.
ETERI	Access ramp in stainless steel, 1500x1100 mm, for 1500x1500 mm platforms.
ETPFI	Kit of 4 plates for fixing on the floor, in stainless steel, for platforms ELC, ETA, ELA, ETM, ETB, ETD, ELD, ETE, ELE, and ETF series.
ETPFIM20	Kit of 4 plates for fixing on the floor, in stainless steel, for platforms ETG, ETH and ETL series.

NOTES

ALWAYS MAKE SURE THAT THE RESULTING INCLINATION OF THE RAMP IS COMPATIBLE WITH THE SPECIFICATIONS OF THE VEHICLES USED FOR LOADING AND UNLOADING.
ALSO PROTECT THE PLATFORM SIDES BY MOUNTING, WHERE NECESSARY, APPROPRIATE ANGULAR PROTECTION PIECES (GUARD RAILS)